



RM5-200-32 - ALUMINIUM

FACADE PROFILE - CE marking according to EN 14782

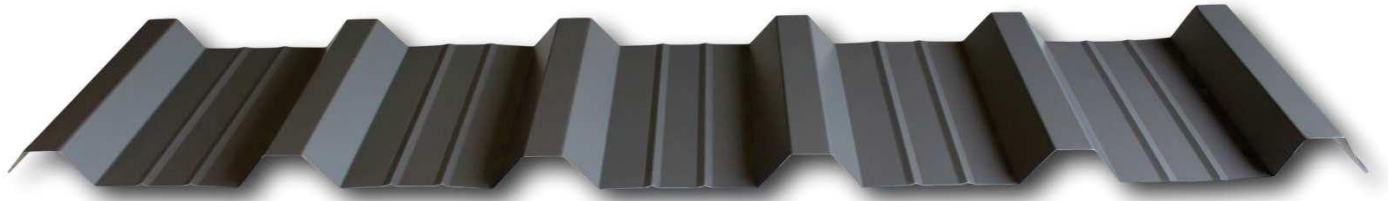

Face A

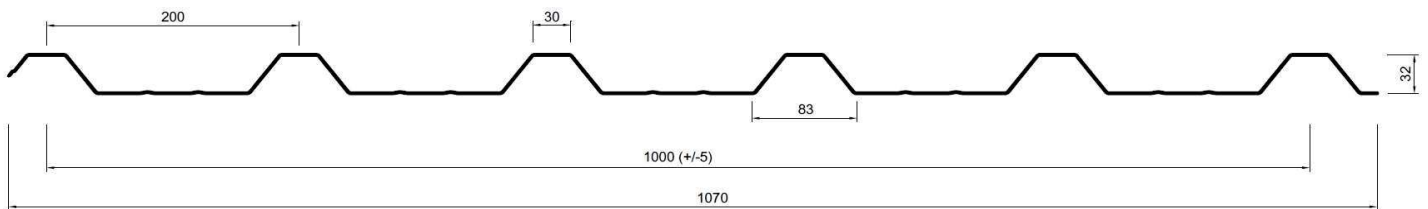

Face B

Base Material / Hardness

Aluminum - Alloy 3105 EN AW other alloys on request – H24 other alloys on request

Coating

Side 1 - Polyester (25 µm) and side 2 - (5/7 µm) other alloys on request

Lacquer property

Shine ECCA T2 – According to specification (min.30U)

Reaction to Fire/Exterior Performance

Class A1 / Class F_{roof}

Corrosion resistance

Acid-Salt Test (*Salt-Spray*)

Thickness	Mass		Moment of Inertia I	Sturdy module W
mm	kg/ml	kg/m ²	cm ⁴	cm ³
0.6	2.03	1.90	2.58	2.87
0.7	2.36	2.22	3.01	3.34
0.8	2.70	2.54	3.44	3.82
1.0	3.38	3.17	4.30	4.78